


NEW Micro RF100 Diver End Mills by Guhring

Ramping, drilling, slotting, roughing & finishing

One end mill – all the processes

Features:

- Special drilling geometry
- The HIPIMS coating DUROX®
- GühroJet coolant ducts
- Available $\varnothing 1/32'' - 1/8''$ (0.8 – 3.0 mm)
- $2.5 \times D$ and $5 \times D$

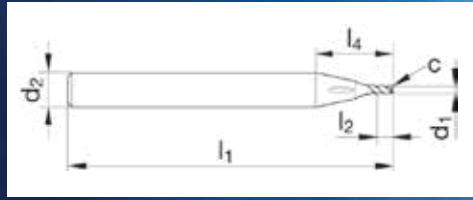

NEW PRODUCT



For more information scan the QR code.

Diameter d1 h8 (inch)	Shank Dia. d2 h5 (mm)	OAL l1 (inch)	Corner Chamfer C (inch)	Length	Order #	Unit Price
1/32	4.00	1-1/2	0.0006	2.5 x D	GUH-9068080007900	\$61.48
3/64	4.00	1-1/2	0.0009	2.5 x D	GUH-9068080011900	\$61.48
1/16	4.00	1-3/4	0.0012	2.5 x D	GUH-9068080015900	\$61.48
5/64	6.00	2	0.0010	2.5 x D	GUH-9068080019800	\$63.59
3/32	6.00	2	0.0018	2.5 x D	GUH-9068080023800	\$63.59
7/64	6.00	2	0.0022	2.5 x D	GUH-9068080027800	\$63.59
1/8	6.00	2	0.0025	2.5 x D	GUH-9068080031750	\$63.59
3/64	4.00	2	0.0009	5 x D	GUH-9068090011900	\$72.19
1/16	4.00	2	0.0012	5 x D	GUH-9068090015900	\$72.19
5/64	6.00	2-1/4	0.0010	5 x D	GUH-9068090019800	\$75.32
3/32	6.00	2-1/4	0.0018	5 x D	GUH-9068090023800	\$75.32
7/64	6.00	2-1/4	0.0022	5 x D	GUH-9068090027800	\$75.32
1/8	6.00	2-1/4	0.0025	5 x D	GUH-9068090031750	\$75.32

GUHRING

Mitutoyo DIAL INDICATOR Series 2



Call Us for Special Pricing

Order #MTI-2416S

Standard Type, Inch Reading:

- Graduation .001"
- Range 1"
- Dial Reading 0-100



G-THRU® SEPARATOR



- Removes solid and liquid contamination from coolants
- Compact
- No floor space utilized
- Simple installation
- Patented transparent design

10x more efficient than belt, disk, and rope skimmers

Reduces waste disposal

Eliminates oily floors

Magnetically mounts on machine tool

No consumables

Clearly the next generation of oil separation technology.

C-Thru® Separator Standard Package

Package includes C-Thru Separator standard tank, magnetic base, float, 115V 60Hz pump, 1" pvc hose (8 ft), 1/2" pvc hose (16 ft), 1" hose clamp (2), 1/2" hose clamp and service instructions.

Order NEX-NJT1500
Price: \$749.99

Gain an edge

Maximize your Steel Turning operations with the new GC4415 and GC4425 inserts from Sandvik Coromant.

- Reduce cost
- Increase output
- Improve process security
- Improve component quality

Find more information on why GC4415/GC4425 is the right solution for you by scanning the QR code.
www.sandvik.coromant.com/steelturning



Contact your local Thomas Skinner representative
1-800-567-2131 • tss@tskinner.com



BALL BEARING DRILL CHUCKS

- Ball bearing design provides higher clamping forces over standard chucks
- High performance even at extreme loads and speeds
- High concentricity of up to 0.15 mm
- Arbors also available
- Designed to prevent unintentional release during operation
- Made in Germany

Capacity	Mount	Key	Order #	Special Price \$
1/32"-1/2"	JT3	S10	ROH-215000	246.63
1/32"-5/8"	JT3	S10	ROH-215001	266.38
3/16"-3/4"	JT4	S13	ROH-215002	439.01

With over 100 years experience in drill chuck production, Rohm manufactures a complete product range from key-type drill chucks to quick-action and self-clamping jaw drill chucks.

Promo code: TSSPRING21



ROHM
driven by technology

CALL OUR Customer Service/Inside Sales: 604-207-3117 or 1-866-999-3117



This promotion is valid until June 30, 2021 or while quantities last. Cannot be combined with other offers.

www.thomasskinner.com

GO / NO-GO PLUG GAGES Made in Germany by Emuge.

With EMUGE thread gages you can control production process safely and economically. Thread gages allow you to quickly recognize size and form deviations – weakened or unfit threads.



UNC – GO/NO-GO PLUG GAGES		
Size	Order#	Special \$
Nr.1-64 UNC-2B	EMU-L01001005000	159.61
Nr.2-56 UNC-2B	EMU-L01001005001	151.71
Nr.3-48 UNC-2B	EMU-L01001005002	129.09
Nr.4-40 UNC-2B	EMU-L01001005003	126.35
Nr.5-40 UNC-2B	EMU-L01001005004	118.43
Nr.6-32 UNC-2B	EMU-L01001005005	116.30
Nr.8-32 UNC-2B	EMU-L01001005006	111.72
Nr.10-24 UNC-2B	EMU-L01001005007	108.99
Nr.12-24 UNC-2B	EMU-L01001005008	104.31
1/4-20 UNC-2B	EMU-L01001005009	103.10
5/16-18 UNC-2B	EMU-L01001005010	108.37
3/8-16 UNC-2B	EMU-L01001005011	110.41
7/16-14 UNC-2B	EMU-L01001005012	115.07
1/2-13 UNC-2B	EMU-L01001005013	125.72
9/16-12 UNC-2B	EMU-L01001005014	130.30
5/8-11 UNC-2B	EMU-L01001005015	135.57
3/4-10 UNC-2B	EMU-L01001005016	154.13
7/8-9 UNC-2B	EMU-L01001005017	179.50
1"-8 UNC-2B	EMU-L01001005018	198.19
1 1/8-7 UNC-2B	EMU-L01001005019	224.75
1 1/4-7 UNC-2B	EMU-L01001005020	224.75
1 3/8-6 UNC-2B	EMU-L01001005021	265.86
1 1/2-6 UNC-2B	EMU-L01001005022	289.91
3/8-16 UNC-3B	EMU-L01001105011	132.41
7/16-14 UNC-3B	EMU-L01001105012	138.30
1/2-13 UNC-3B	EMU-L01001105013	147.63
9/16-12 UNC-3B	EMU-L01001105014	154.13
5/8-11 UNC-3B	EMU-L01001105015	163.56
3/4-10 UNC-3B	EMU-L01001105016	186.20

UNF – GO/NO-GO PLUG GAGES		
Size	Order#	Special \$
Nr.0-80 UNF-2B	EMU-L01001005033	190.15
Nr.1-72 UNF-2B	EMU-L01001005034	159.61
Nr.2-64 UNF-2B	EMU-L01001005035	151.71
Nr.3-56 UNF-2B	EMU-L01001005036	142.27
Nr.4-48 UNF-2B	EMU-L01001005037	126.35
Nr.5-44 UNF-2B	EMU-L01001005038	118.43
Nr.6-40 UNF-2B	EMU-L01001005039	116.30
Nr.8-36 UNF-2B	EMU-L01001005040	111.72
Nr.10-32 UNF-2B	EMU-L01001005041	108.99
Nr.12-28 UNF-2B	EMU-L01001005042	105.73
1/4-28 UNF-2B	EMU-L01001005043	104.31
5/16-24 UNF-2B	EMU-L01001005044	108.37
3/8-24 UNF-2B	EMU-L01001005045	110.41
7/16-20 UNF-2B	EMU-L01001005046	115.07
1/2-20 UNF-2B	EMU-L01001005047	125.72
9/16-18 UNF-2B	EMU-L01001005048	129.88
5/8-18 UNF-2B	EMU-L01001005049	133.05
3/4-16 UNF-2B	EMU-L01001005050	146.20
7/8-14 UNF-2B	EMU-L01001005051	164.90
1"-12 UNF-2B	EMU-L01001005052	183.47
1 1/8-12 UNF-2B	EMU-L01001005053	197.77
1 1/4-12 UNF-2B	EMU-L01001005054	212.78
1 3/8-12 UNF-2B	EMU-L01001005055	232.68
1 1/2-12 UNF-2B	EMU-L01001005056	259.37
3/8-24 UNF-3B	EMU-L01001105045	132.41
7/16-20 UNF-3B	EMU-L01001105046	138.30
1/2-20 UNF-3B	EMU-L01001105047	147.63
9/16-18 UNF-3B	EMU-L01001105048	154.13
5/8-18 UNF-3B	EMU-L01001105049	159.61
3/4-16 UNF-3B	EMU-L01001105050	175.55

Metric – GO/NO-GO PLUG GAGES		
Size	Order #	Special \$
M 1.6-6H	EMU-LU1001000016	266.51
M 2-6H	EMU-LU1001000020	170.28
M 2.5-6H	EMU-LU1001000025	118.75
M 3-6H	EMU-LU1001000030	146.42
M 3.5-6H	EMU-LU1001000035	142.58
M 4-6H	EMU-LU1001000040	127.62
M 5-6H	EMU-LU1001000050	142.58
M 6-6H	EMU-LU1001000060	119.11
M 8-6H	EMU-LU1001000080	119.11
M 10-6H	EMU-LU1001000100	95.79
M 11-6H	EMU-LU1001000111	119.94
M 12-6H	EMU-LU1001000112	120.49
M 14-6H	EMU-LU1001000114	156.50
M 16-6H	EMU-LU1001000116	139.93
M 18-6H	EMU-LU1001000118	174.23
M 20-6H	EMU-LU1001000120	168.43
M 22-6H	EMU-LU1001000122	192.42
M 24-6H	EMU-LU1001000124	216.65
M 30-6H	EMU-LU1001000130	236.91
M 36-6H	EMU-LU1001000136	251.71
M 5x0,5-6H	EMU-LU1001000218	140.07
M 6x0,75-6H	EMU-LU1001000229	198.99
M 8x0,75-6H	EMU-LU1001000250	134.59
M 8x1-6H	EMU-LU1001000251	178.96
M 10x1-6H	EMU-LU1001000276	187.87
M 10x1,25-6H	EMU-LU1001000277	178.96
M 12x1,25-6H	EMU-LU1001000302	191.22
M 12x1,5-6H	EMU-LU1001000303	188.27
M 14x1,5-6H	EMU-LU1001000331	198.99
M 15x1,5-6H	EMU-LU1001000345	199.88
M 16x1,5-6H	EMU-LU1001000359	206.53
M 18x1,5-6H	EMU-LU1001000390	215.84
M 20x1,5-6H	EMU-LU1001000422	228.18
M 22x1,5-6H	EMU-LU1001000438	238.65




- Made of premium high strength gage steel – durable and accurate.
- A cleansing channel is ground into the GO side – eliminates thread
- Recessed minor thread diameter – safe functionality and to accommodate burrs.
- Knurled handle – for maximum gripping ability and safety.
- Reduced thread pilot diameter construction – easy insertion.

GERMAN ENGINEERED AND MADE WITH UNSURPASSED EMUGE QUALITY. Competitively priced. Short form Certificate of Accuracy is included.

Accommodates 2B, 3B and 6H classes of fit. Also available UNS and NPT.

→ SPRING SAVINGS ON RÖHM LIVE CENTERS

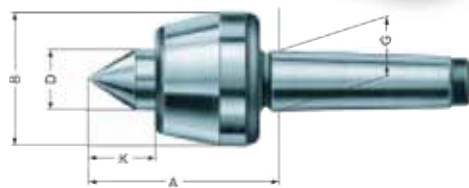

LIVE CENTERS PRO STANDARD



- Body made of forging blanks: Continuous fiber flow yields 30-40% stronger structure
- Lifetime lubrication: maintenance free, long service life
- Precise roller & needle bearing: maximum concentricity deviation of up to 0.003 mm
- Slender housing: minimum interference
- Repairable
- Made in Germany

Promo code: TSSPRING21

Order #	ROH-043400	ROH-043115	ROH-042315	ROH-042175	ROH-042843	ROH-043532	ROH-093440
Mount MT	1	2	3	4	5	6	Metr. 80
Size	101	102	104	108	110	114	116
A mm	60,5	65	70,5	102,5	129	152	196
B mm	34,5	43	48,5	68,5	88,5	102,5	138,5
D mm	15	20	22	32	40	50	60
G mm	12,065	17,78	23,825	31,267	44,399	63,348	80
K mm	17	24	27	40	49,5	57	66
Workpiece weight max. kg	100	200	400	800	2000	3500	7500
Concentricity deviation max. mm	0,005	0,005	0,005	0,005	0,005	0,008	0,015
Speed max. min ⁻¹	7000	7000	6300	3800	3000	2600	1500
Spare live centres (optional)	1241726	1241725	1241724	1241722	1241721	1241728	1241730
Special Price \$	328.58	328.58	342.21	457.29	663.22	1,324.93	3,338.82

CALL OUR Customer Service/Inside Sales: 604-207-3117 or 1-866-999-3117



This promotion is valid until June 30, 2021 or while quantities last. Cannot be combined with other offers.